

External Li-ion Battery Pack for WireFree RTS motors Quick Guide

BEFORE YOU BEGIN:

- Be certain you have the correct Somfy plug-in charger for your battery pack (see Ref/fig below #9025166)
- Battery should be charged completely prior to installation.
- Ensure you comply with the recharging instructions.
- The optimum recharging temperature is between 32°F and 113°F.
- Do not disassemble or alter the battery.
- Must only be used with Somfy External Battery WireFree motors (refer to the motor instructions for programming).
- Do not use or install this product outdoors.
- Product must never be dropped, immersed in water or exposed to flammable materials.
- Battery pack should always be replaced with Somfy certified replacement.



External Li-ion Battery Pack #9021217 items included:

- 1 Battery (above)
- (1 Pair) of Wall/Ceiling mount Brackets
- (1 Pair) of Headrail mount Brackets
- (1 Pair) of screws and mounting anchors

Accessories:




Charger with 6ft. Cable
#9025166



8" Charger Extension Cable
#9021131




94.5" Charger Extension Cable
#9021016

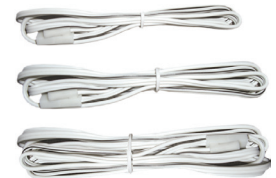



Motor Extension Cables
10" - #9018623
48" - #9016736
96" - #9018624

MOUNTING METHODS:

A) With a wall/ceiling bracket

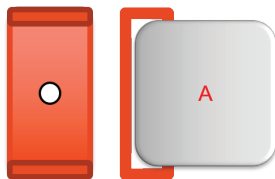

B) With a headrail mount bracket

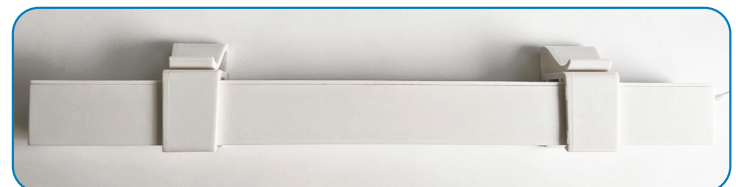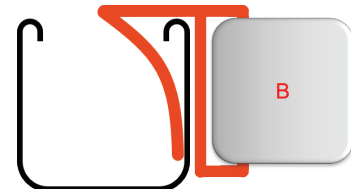

Quick Guide to charging Li-ion battery pack

NOTE

When using tubular motors with LED indicator on the motorhead LED will slowly blink (red) when battery requires charging.



STEP 1

If battery pack charging port is accessible simply plug charger into battery pack charging port (see fig.1) and skip to STEP 4. If battery charging port is not accessible, follow STEP 2.



NOTE: Using battery charging accessory (Ref. 9021131 or 9021016) illustrated above can facilitate access to the battery pack charging port.


STEP 2

Disconnect battery pack cable connector from motor cable connector, then simply remove battery pack from brackets to charge.



STEP 3

Attach small connector from wall charger to charging port of battery pack.

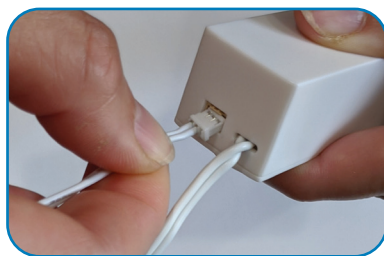

STEP 4

Plug Wall charger into a nearby electrical outlet. The LED indicator will illuminate RED while battery is charging.


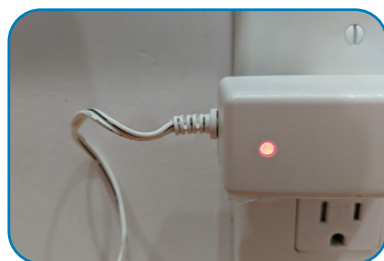


Fig. 1

STEP 5

Once LED illuminates GREEN, battery is fully charged. Disconnect wall charger connector from battery charging port, then remove wall charger from electrical outlet.

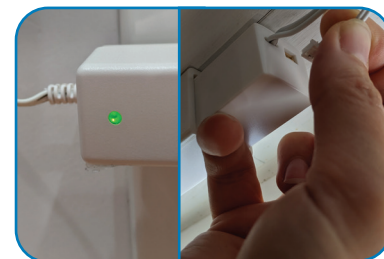

STEP 6

If battery was removed from brackets for charging, simply reinstall battery pack into mounting brackets.



STEP 7

Reconnect battery pack cable connector to the motor cable connector.



STEP 8

Manage the placement of all cords making certain they do not interfere with movement of window covering. Be certain motor antenna is exposed for optimal radio performance.

