



NOTES:

- Support for RadioRA®2, Quantum®, and GRAFIK Eye® QS systems.
- Requires the Lutron QSE-CI-NWK-E except when used with RadioRA®2.
- Max 50' from RS232 port to RS232 port.

**Universal RTS Interface II (URTSI II)
#1810872**


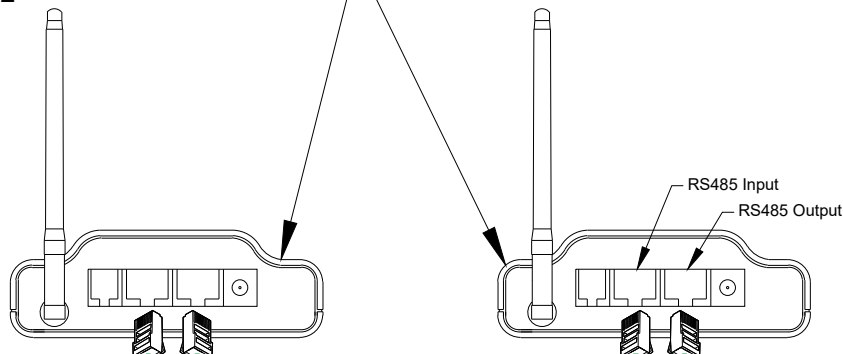


**Somfy Connect LTI
#1870210**

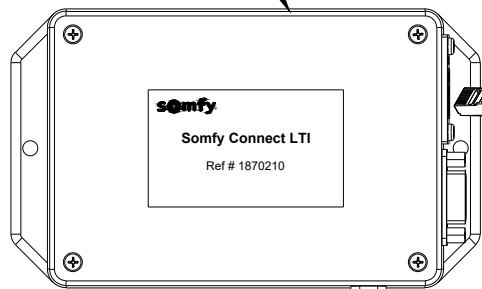

- Standard CAT-5e or higher cable
- Max distance from Somfy Connect LTI to last URTSI II is 4000'
- Powers up to 4 URTSI II's when using the Power Supply included with Somfy Connect LTI

To RS485
INPUT on next
URTSI II

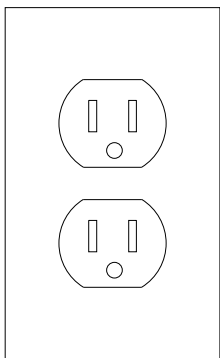

9V DC Wall Mount Power Supply
#57002100
(Included with Somfy Connect LTI)

Straight Through RS232 Cable with DB9 Termination

- Included with Somfy Connect LTI
- Max distance from RS232 port to RS232 port is 50'

DB9 Pinout	
Utilizing DB9 termination standard	
Pin #	Function
2	RX
3	TX
5	Ground

