

Roll Up Wired™ R28 WT

Pin mount Part # 1002832
 Flush mount Part # 1002833
 Star mount Part # 1002834



Applications




Technical Features

Voltage Supply	24V DC
Index Protection Rating	IP 30
Limit Switch Type	Electronic
Limit Switch Capacity	60 Turns

Temperature Working Range	14° F to 185° F (-10° C to 85° C)
Insulation Class	Class III

Dimensions - in. (mm)

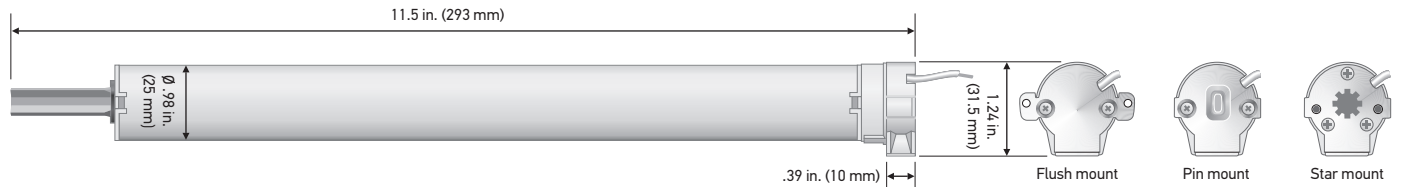

Performances

ROLL UP WIRED™ R28 WT

Voltage	24V DC
Torque	0.8 Nm
Over Current Protection	1A
*Sound Level	48 dBA - 57dBA
Speed	30 rpm

* According to standards ISO 3741 NF 31022 in dB(A) ref. IPW

Included Cables

24V DC POWER CABLE (attached to motor)
 Male JST Connector 11.8 in. (300 mm) Length

24V DC EXTENSION CABLE
 Female JST Connector 86.6 in. (2200 mm) Length

2 Conductor
 AWG 24 with soldered wire ends



STRIPE = positive or negative

WHITE = negative or positive